



DREAMAX^{series} VL-605W-210M/120

Monocrystalline PERC Module

2173×1303×35

Module dimensions (mm)

210×105

Cell size (mm)

120 CELL

Mono PERC module

580-605Wp

Power output

1500V DC

Max. system voltage

21.37%

Max. efficiency

KEY FEATURES



Higher Power Output

Module power increases by 5-25% generally, bringing significantly lower LCOE and higher IRR. 0-5w positive tolerance output warranty.



Most Advanced Production Technologies

Optimize module current profile, improve system-side power generation.



Multi Busbar Technology

By improving optical utilization rate, power increases by 2~3% and efficiency increases by 0.4~0.6%.



PID

PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and material control.



Low-light Performance

Excellent performance in low light.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pa) and snow load (5400 Pa).



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV NORD.



2 EL

EL Full Inspection

Dual stage 100% EL Inspection warranting defect-free product.



Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716

ISO 9001: Quality Management System


ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

OHSAS 18001: Occupational Health and Safety Management System


LINEAR PERFORMANCE WARRANTY

12-year product warranty / 25-year linear power warranty

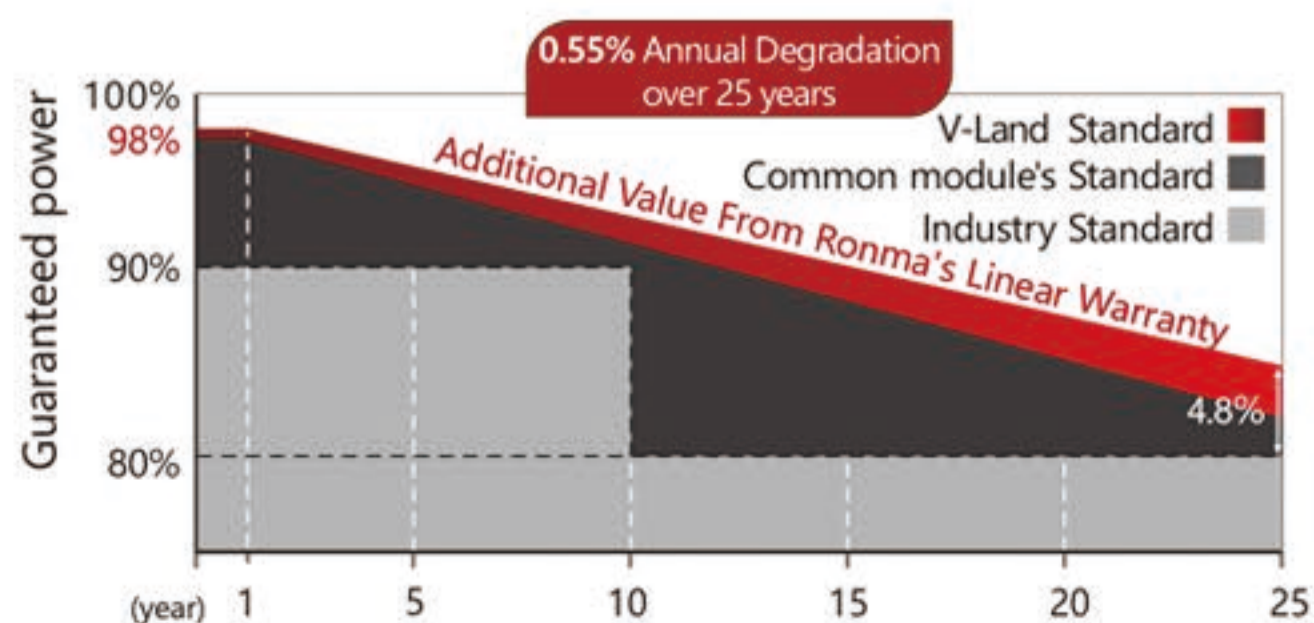




Dimensions of PV Module

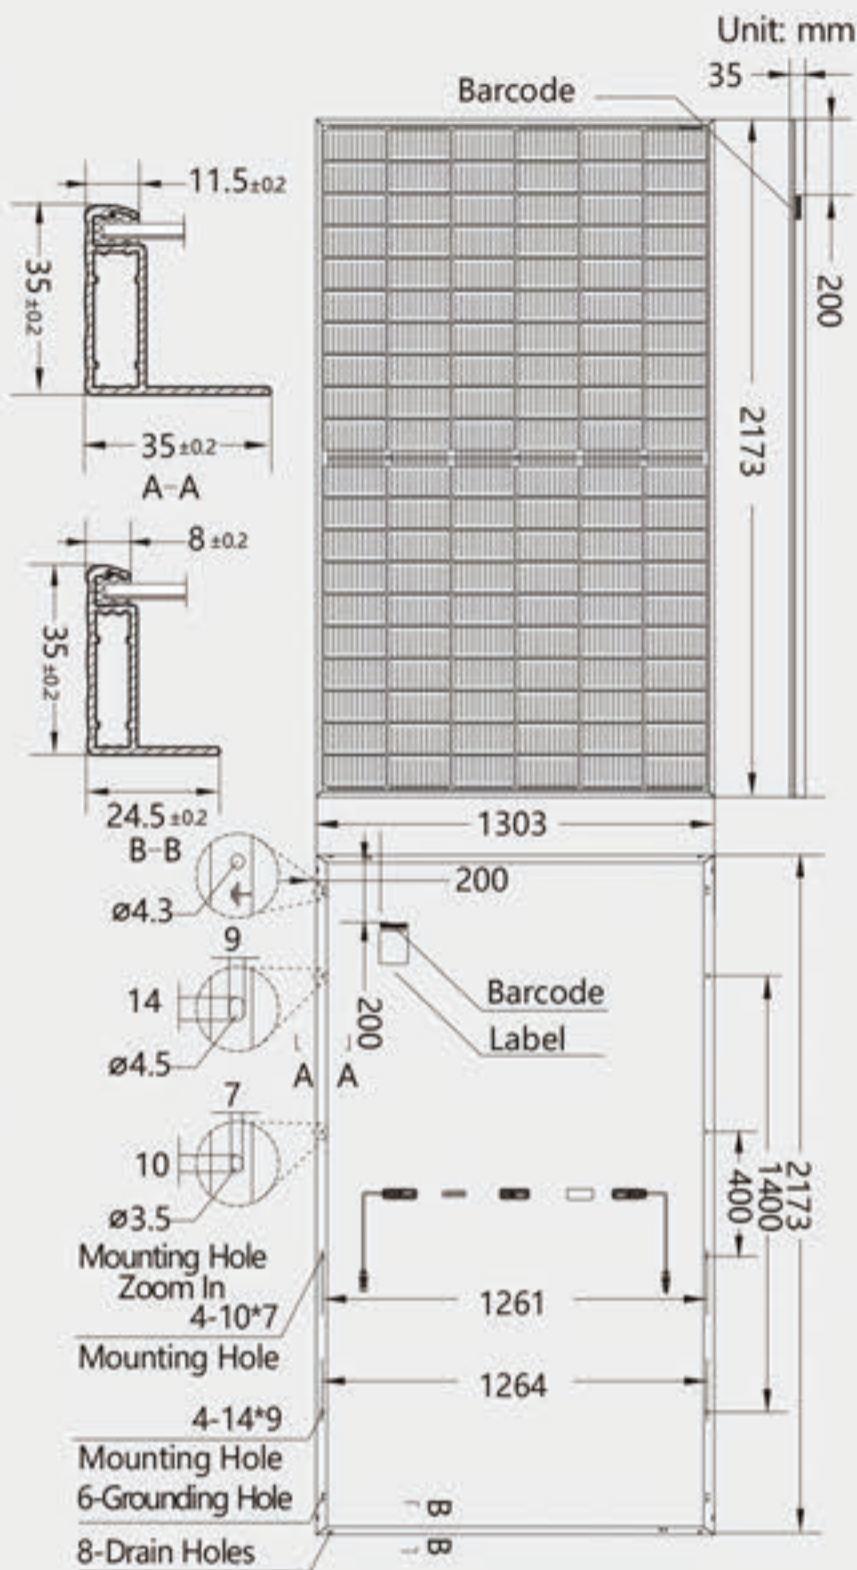


VL-605W-210M/120

I-V characteristics at different irradiances

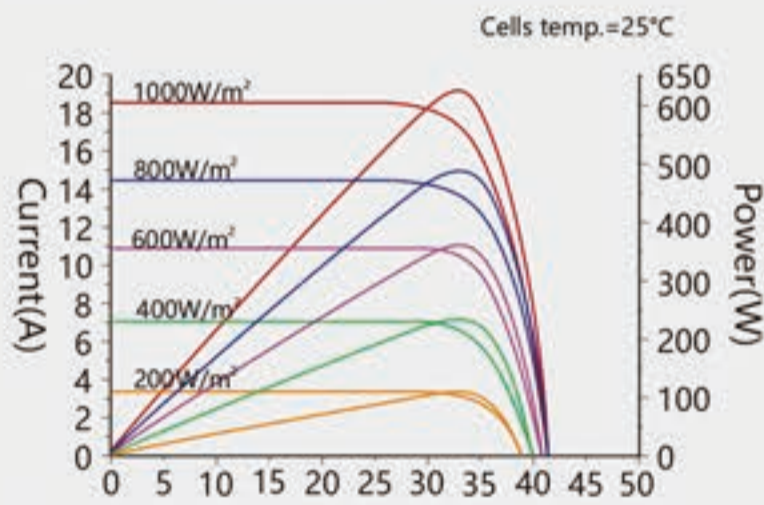

I-V characteristics at different temperatures

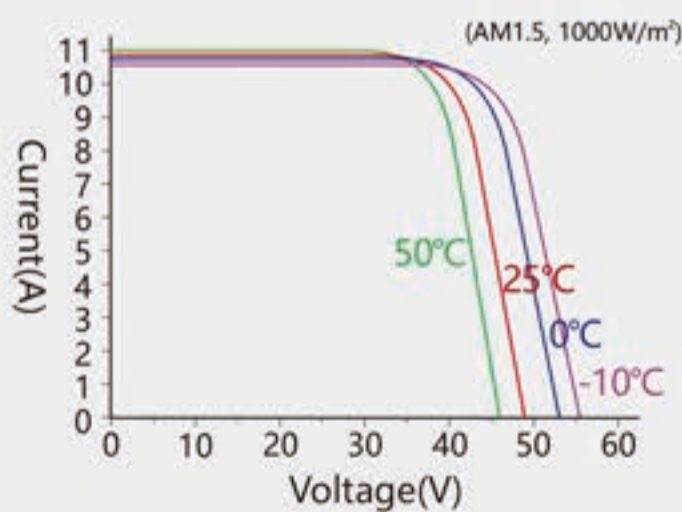

ELECTRICAL DATA(STC)

Model Number	VL-515W-210M/108	VL-520W-210M/108	VL-525W-210M/108	VL-530W-210M/108	VL-535W-210M/108	VL-540W-210M/108
Rated Power in Watts-Pmax(Wp)	580	585	590	595	600	605
Open Circuit Voltage-Voc(V)	40.90	41.10	41.30	41.50	41.70	41.90
Short Circuit Current-Isc(A)	18.23	18.26	18.31	18.36	18.42	18.47
Max. Power Voltage-Vmpp(V)	33.80	34.00	34.20	34.40	34.60	34.80
Max. Power Current-Impp(A)	17.16	17.21	17.25	17.30	17.34	17.39
Module Efficiency(%)	20.48	20.66	20.84	21.01	21.19	21.37

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM 1.5,
 NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Size	210mm×105mm
Cell Configuration	120 cells (6×10+6×10)
Module Dimensions	2173×1303×35mm
Weight	31.5kg
Glass	High Transmission, Low Iron, Tempered ARC Glass 3.2mm
Back Sheet	White
Frame	Anodized Aluminium Alloy type 6005 T6, Silver/Black Color
J-box	PV-RM01, IP68, 1500V DC, 3 Diodes
Cables	4.0mm ² , (+) 300mm, (-) 300mm (Connector Included)
Connector	MC4-compatible

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	44°C ± 2°C
Temperature Coefficient of Voc	-0.27%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.36%/°C
Operational Temperature	-40°C ~ +85°C
Max. System Voltage	1500V DC
Max. Series Fuse Rating	30A

PACKAGING CONFIGURATION

	40ft(HQ)
Number of Modules Per Container	310
Number of Modules Per Pallet	31
Number of Pallets Per Container	10
Packaging Box Dimensions (l×w×h) (mm)	2200×1135×1350
Box Gross Weight (kg)	1006