



DREAMAX^{series} VL-540W-210M/108

Monocrystalline PERC Module

1926×1303×35 **210×105**

Module dimensions (mm) Cell size (mm)

108 CELL **515-540Wp**

Mono PERC module Power output

1500V DC **21.12%**

Max. system voltage Max. efficiency



KEY FEATURES



Higher Power Output

Module power increases by 5-25% generally, bringing significantly lower LCOE and higher IRR. 0-5w positive tolerance output warranty.



Most Advanced Production Technologies

Optimize module current profile, improve system-side power generation.



Multi Busbar Technology

By improving optical utilization rate, power increases by 2~3% and efficiency increases by 0.4~0.6%.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and material control.



Low-light Performance

Excellent performance in low light.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pa) and snow load (5400 Pa).



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV NORD.



EL Full Inspection

Dual stage 100% EL Inspection warranting defect-free product.




Comprehensive Products and System Certificates

- IEC61215/IEC61730/IEC61701/IEC62716
- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO14064: Greenhouse Gases Emissions Verification
- OHSAS 18001: Occupational Health and Safety Management System

LINEAR PERFORMANCE WARRANTY


12-year product warranty / 25-year linear power warranty

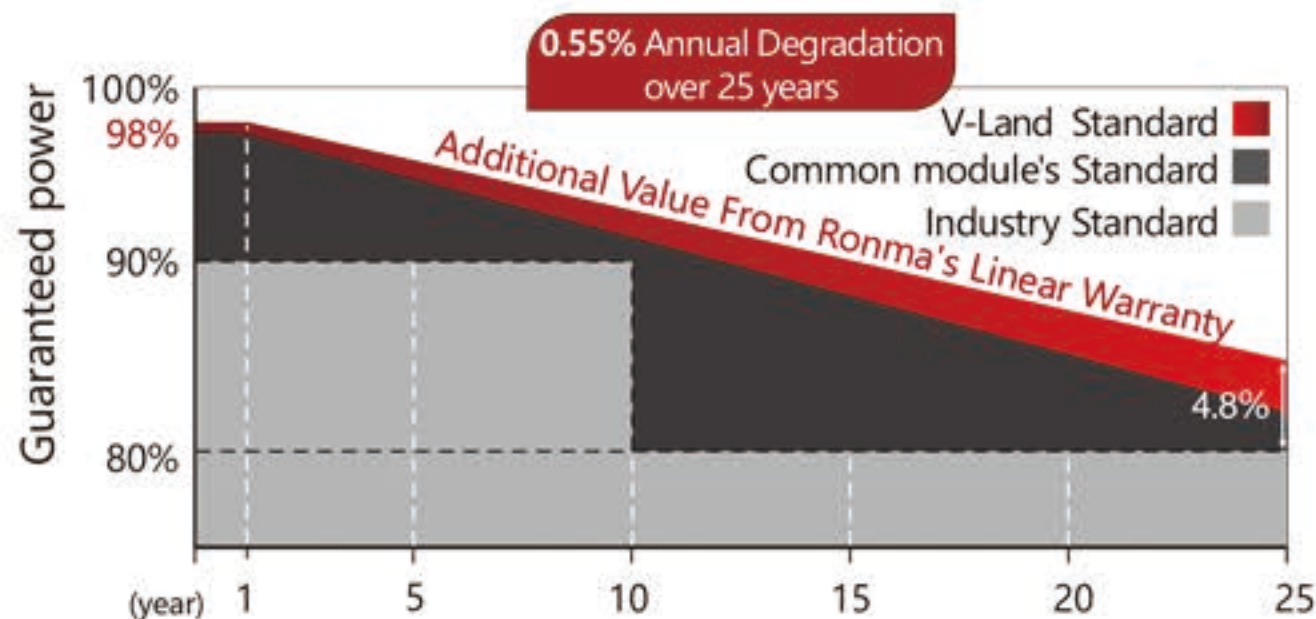



Dimensions of PV Module


Unit: mm

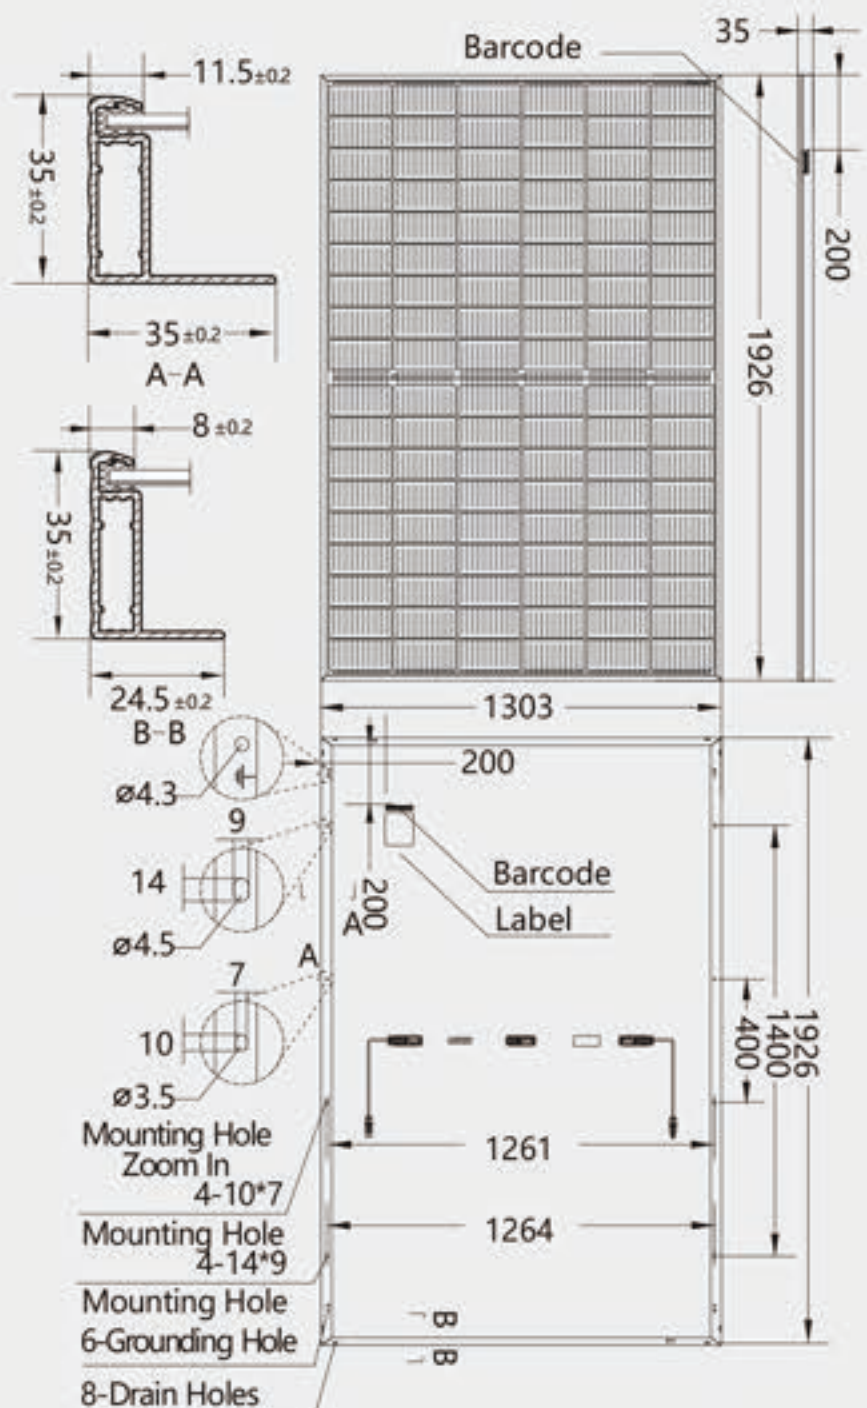

VL-540W-210M/108


I-V characteristics at different irradiances

Cells temp.=25°C

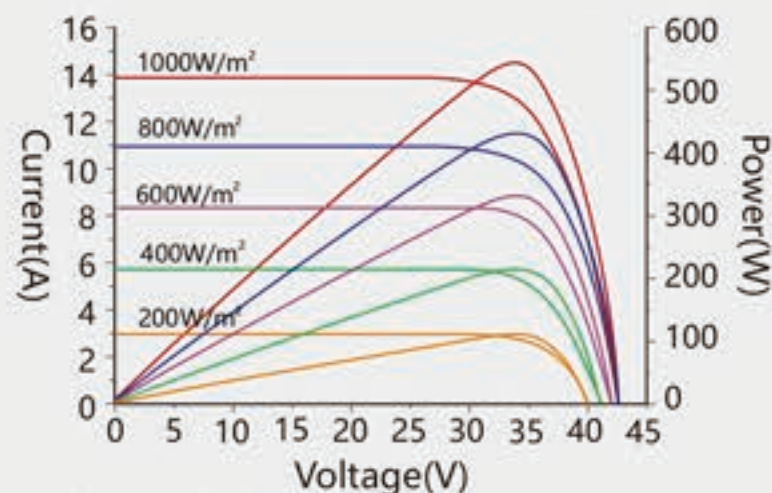

I-V characteristics at different temperatures

(AM1.5, 1000W/m²)

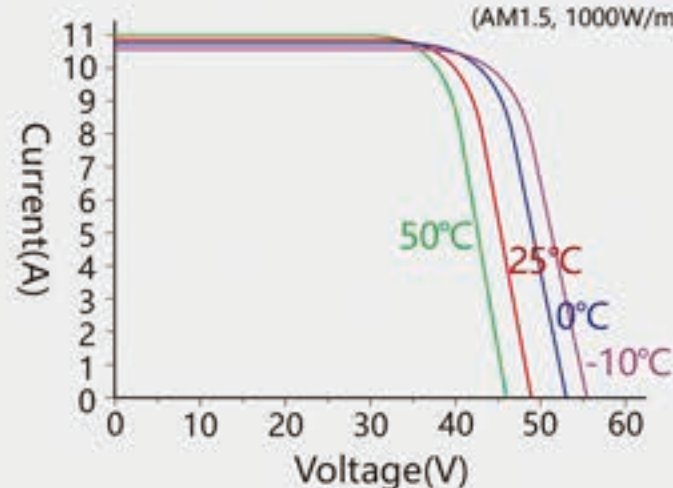

ELECTRICAL DATA(STC)

Model Number	VL-515W-210M/108	VL-520W-210M/108	VL-525W-210M/108	VL-530W-210M/108	VL-535W-210M/108	VL-540W-210M/108
Rated Power in Watts-Pmax(Wp)	515	520	525	530	535	540
Open Circuit Voltage-Voc(V)	36.70	36.90	37.10	37.30	37.50	37.70
Short Circuit Current-Isc(A)	18.04	18.09	18.14	18.19	18.24	18.30
Max. Power Voltage-Vmpp(V)	30.40	30.60	30.80	31.00	31.20	31.40
Max. Power Current-Impp(A)	16.95	17.00	17.04	17.11	17.16	17.21
Module Efficiency(%)	20.14	20.34	20.54	20.73	20.93	21.12

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM 1.5,
 NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Size	210mm×105mm
Cell Configuration	108 cells (6×9+6×9)
Module Dimensions	1926×1303×35mm
Weight	28.5kg
Glass	High Transmission, Low Iron, Tempered ARC Glass 3.2mm
Back Sheet	White
Frame	Anodized Aluminium Alloy type 6005 T6, Silver/Black Color
J-box	PV-RM01, IP68, 1500V DC, 3 Diodes
Cables	4.0mm ² , (+) 300mm, (-) 300mm (Connector Included)
Connector	MC4-compatible

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	44°C ± 2°C
Temperature Coefficient of Voc	-0.27%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.36%/°C
Operational Temperature	-40°C ~ +85°C
Max. System Voltage	1500V DC
Max. Series Fuse Rating	30A

PACKAGING CONFIGURATION

	40ft(HQ)
Number of Modules Per Container	372
Number of Modules Per Pallet	31
Number of Pallets Per Container	12
Packaging Box Dimensions (l×w×h) (mm)	1990×1135×1350
Box Gross Weight (kg)	.910